



Micronet[®]
Faster and Easier Networks



Micronet SP3501A Series


VDSL CO/CPE Modem

Cost-Effective and High Performance Broadband Access suited for Multiunit Building Environments.

Micronet SP3501AM / SP3501AS VDSL Modem delivers cost-effective and high-performance broadband access to multiunit building environments, such as enterprise, campus, hospital, hotel, and telecom. With QAM-based 4-band VDSL technology, the VDSL solution dramatically extends Ethernet and supports 5M/15M/25Mbps symmetrical bandwidth over existing telephone-grade wiring up to 1.9/1.3/0.8KM.

Key Features

- Compliant with ETSI, ITU, ANSI standards
- Compliant with IEEE802.3 10BASE-T and IEEE802.3u 100BASE-TX standards
- Compatibility with xDSL, ISDN (2B1Q/4B3T)
- QAM-based 4-band VDSL
- 48Gbps non-blocking switching capability
- Data rate up to symmetrical bandwidth of 25Mbps
- Wiring range up to 1.9KM
- Auto MDI/MDIX and auto negotiation on Ethernet port
- Auto-speed function for VDSL link
- Built-in POTS/ISDN splitter (SP3501AM) for POTS/ISDN telephone service

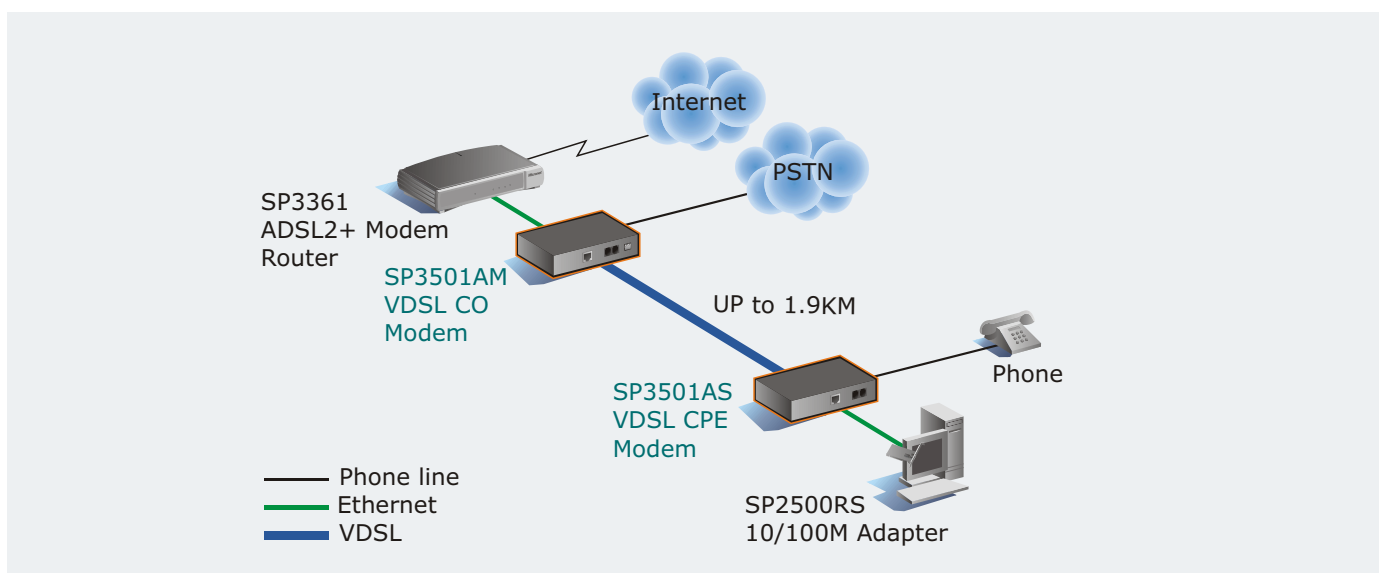

VDSL CO/CPE Modem

SPECIFICATION AND PRODUCT FEATURES

Model	SP3501AM/SP3501AS
Standards	ETSI, ITU and ANSI standards IEEE802.3 10BASE-T and IEEE802.3u 100BASE-TX standards
Interface	1 X RJ-45 10/100Mbps Ethernet port 1 X RJ-11 connector for telephone connection 1 X RJ-11 connector for EoVDSL
Distance	Data Rate 5M/5M: up to 1.9km Data Rate 15M/15M: up to 1.3km Data Rate 25M/25M: up to 800m
Features	POTS/ISDN voices pass through 4wires phone set pass through Compatibility with xDSL, ISDN (2B1Q/4B3T). Surge protection Long packet size up to 1536 bytes Auto MDI/MDIX and auto negotiation on Ethernet port Auto speed function and full duplex on VDSL port Built-in splitter (SP3501AM) UPnP
VDSL Frequency Spectrum	SP3501AM: Transmitter: 900 KHz ~ 3.9MHz Receiver: 4MHz & 7.9MHz SP3501AS: Transmitter: 4MHz ~ 7.9MHz Receiver: 900 KHz ~ 3.9M
Flow Control	IEEE802.3x for Full Duplex Back Pressure for Half Duplex
Power Supply	Input: AC 85-240 volts/50-60Hz Output: DC 5V, 1A or above
Dimension	95 x 110 x 24 mm

ORDERING INFORMATION

Model	Description
SP3501AM	VDSL CO Modem
SP3501AS	VDSL CPE Modem



SP3501A Series VDSL CO/CPE Modem

- ① LED Indicators
- ② Line Port
- ③ Phone Port
- ④ Ethernet Port
- ⑤ Frame Ground
- ⑥ Power Jack


COMPANION PRODUCTS

Consider the following Micronet products as a factor in your network planning.

- 56K Modem
- ADSL and Broadband
- Internet Camera
- ISDN TA / Router
- KVM Switch
- Media Converter
- Mobile Communication
- Network Interface Card
- PCMCIA and Compact Flash
- Powerline
- Print Server
- Switch and Hub/SOHO
- Switch/Enterprise
- USB Device Family
- VDSL
- VoIP Telephony
- Wireless LAN
- Wiring System

Copyright © 2005 Micronet Communications Inc. All technical information in this document is subject to change without prior notice. Micronet, EtherFast and MicroView are registered trademarks of Micronet Communications Inc. Microsoft, Windows, Windows 95, Windows 98, Windows NT, Windows 2000 are registered trademarks of Microsoft Corporation. Novell and Netware are registered trademarks of Novell Inc. All other trademarks and registered trademarks are properties of their respective holders.

Distributor:

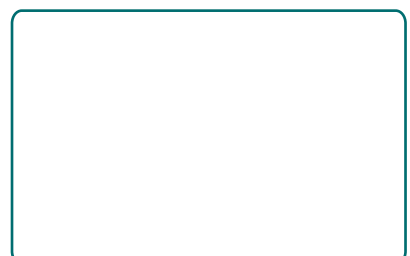

Headquarter
Micronet Communications Inc.
10251 Prado Vista Dr., Cupertino, CA95014, California, USA

Manufacturer and Exporter
Spectrum Technologies Corp.

E-mail: sales@micronet.info; support@micronet.info Web: http://www.micronet.info

